



vizULO

Eagle




Eagle

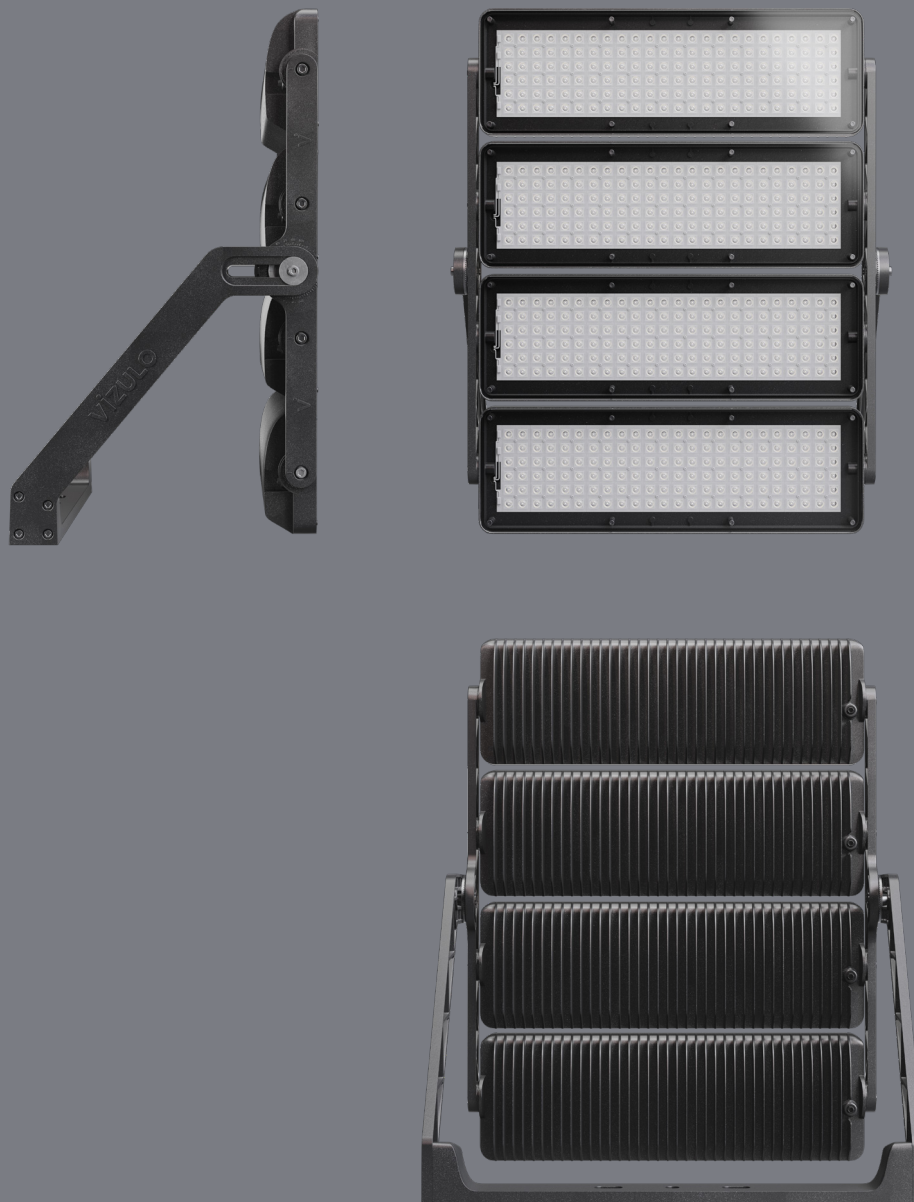

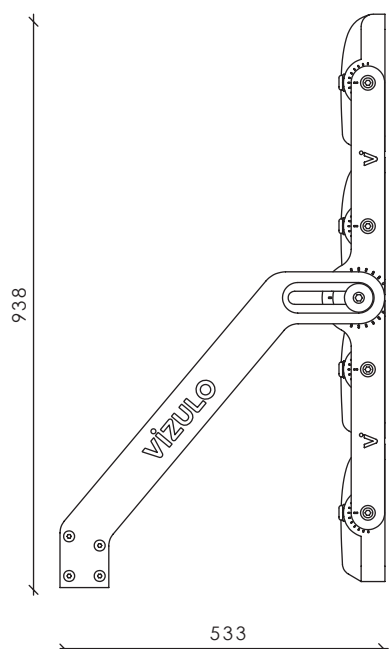

RAL9006

Other colors
available on request

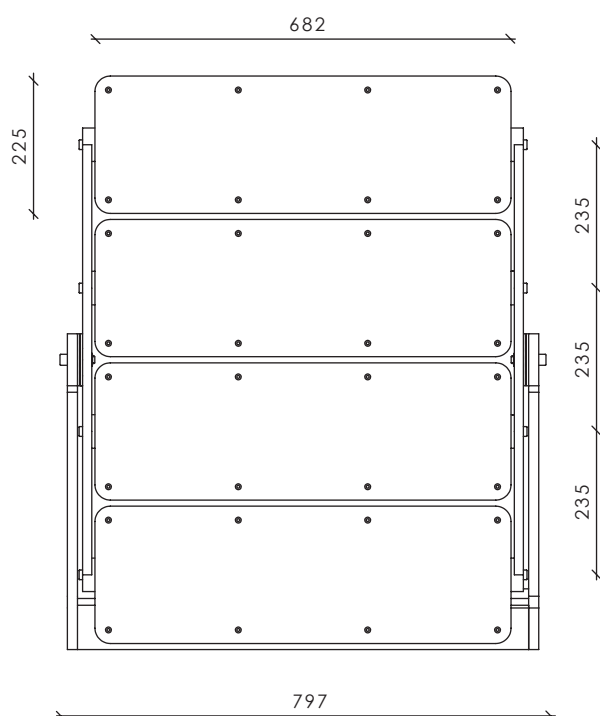

Technical information



V	220 - 240	1-10V; DALI
Hz	50 - 60	Warranty 5 years
W	~2400 *	50 000 h (L90B10) at Ta = 25 °C
lm	~320 000 ^{(1) *}	Max distance between driver box and luminaire <200 m
lm/W	136 *	HDTV optimized flicker performance
K	3000 / 4000 / 5000 ⁽²⁾	Flicker index (< 50 kHz) < 0,05
°C	-40 to +50	Flicker % (< 3kHz) < 2 %
CRI	>70 / >80 ⁽³⁾	Flicker % (> 3kHz) < 4 %

<i>Surge protection:</i>	10 kV
<i>Body:</i>	Die-cast aluminum
<i>Body color:</i>	Silver - RAL 9006
<i>Console:</i>	Floodlight
<i>Weight:</i>	36 kg (without driver box)

*Preliminary data


⁽¹⁾ Lumen output indicated at 4000 K, CRI>70

⁽²⁾ Different CCT on request


⁽³⁾ CRI>90 on request

Optics


07




08




10




13




14




15




16




35




L60




L87



L88



L89





VIZULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

office@vizulo.com
www.vizulo.com



VIZULO



VIZULO_PHOTO